SD NAND 10 CMD6


CMD6 data

CMD6 CMD (CMD12, CMD13)

: CMD6 CMD6
CMDO

CMD6 cmd12


1: ( ) CMD12 CRC 15
CMD12 CMD6 CMD6 CMD0

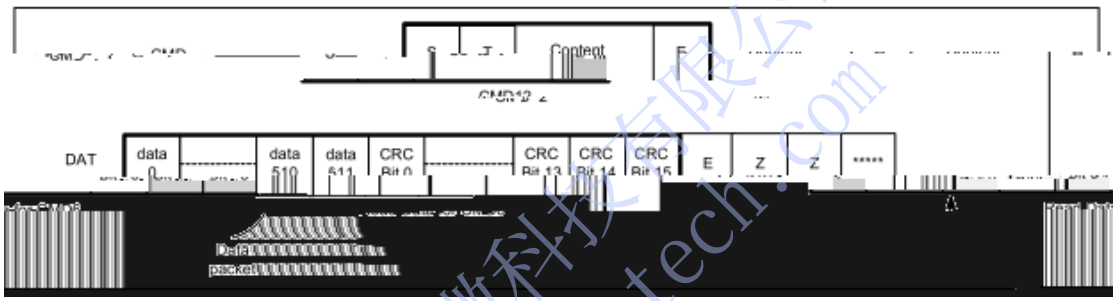

CMD12 during CMD6; Case 1

2: ( ) CMD6
CMD12

: CMD6 CMD12

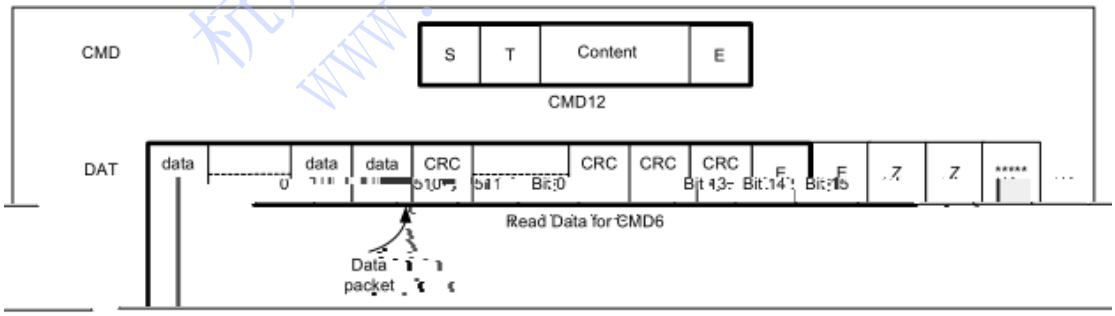

g CMD6; Case 2 CMD12 durin

4-18 (a) (c)
CMD6

杭州瀚海微科技有限公司 www.hanhai-tech.com


Card Condition
Current function = command system: For eC (0x1), access mode: Default (0x0)
Switch example: command system: For eC => Default access mode: Default => High-Speed
Case (3) – Switch function with no error
Read Data = [511:496] = '0000 0000 0100 000
'1000 0000 0000 0001'
& '1000 0000 0000 0011' & '1000 0000 0000 0011'
[375:368] = Data Structure Version
[367:272] = Busy Status of functions in group 1-6
High-Speed
For eC